



AWM.
AMAROO
HOUSE FABRIC RANGE

BEACON | CATEGORY 1

RANGE NAME	BEACON
Product Brand	PRET/KAVLON/SHRUGS
Description	High Performance, Easy Clean, Furniture Fabric with minimum 40% PC Polyester yarns from recycled plastic bottles. Machine Washable
Performance	Heavy Commercial
Application	Upholstery, Commercial
Composition	40% PC Recycled Polyester 60% Virgin Polyester
Width	140cm
Weight	450gsm
Pattern Repeat	Plain
Care Lable	8
Stain Resistant	KAVLON-PFC Free Inherent stain resistance
Warranty	3 Years* (In accordance with care instructions)

CARE

Wash to 40°C
Do not chlorine bleach
Do not tumble dry
Professional dry clean
Drip line drying in the shade
Warm iron (150°C) reverse side
using barrier cloth


TEST STANDARDS	TEST RESULTS
Martindale Abrasion ISO 12947	89000 Cycles
Seam slippage (mm) ISO 13936-2	Warp: 3.0 Weft: 2.7
Colour fastness to light- Xenon arc (ISO 105-B02, blue std 6)	5
Colour fastness to rubbing ISO 105-X12:1993	4-5
Free and hydrolysed formaldehyde ISO 14184-1:1998	Not Detectable
Pilling resistance ISO 12945-2	4

FLAMMABILITY-AS/NZS 1530.3-1999

Ignitability (0-20)	0
Spread of Flame (0-10)	0
Heat Evolved (0-10)	0
Smoke Developed (0-10)	1
USA Fire Test-US Cal. Bull 1172013	PASS
Oekotex Standard 100	YES
Quality Management System ISO 9001	YES
Machine Washability - ISO 6330:2021	PASS



Beacon Snow

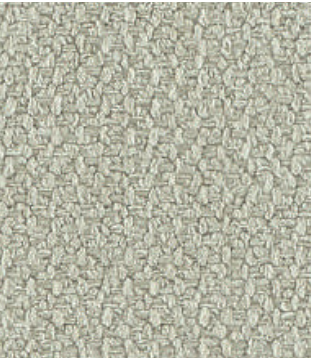

Beacon Pebble



Beacon Oatmeal



Beacon Earth



Beacon Flint



Beacon Titanium




Beacon Gunmetal




Beacon Brumby




Beacon Harvet

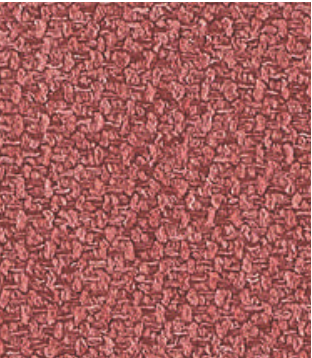


Beacon Coral

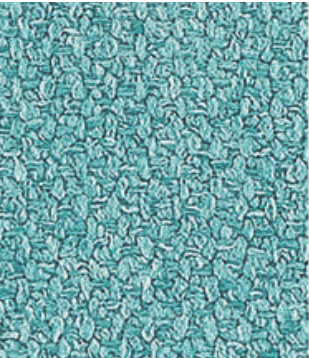


Beacon Lagoon

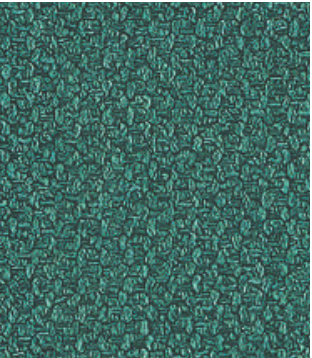


Beacon Jasper

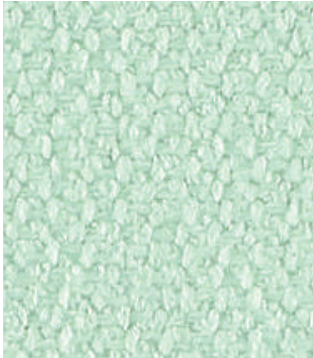

Beacon Mint

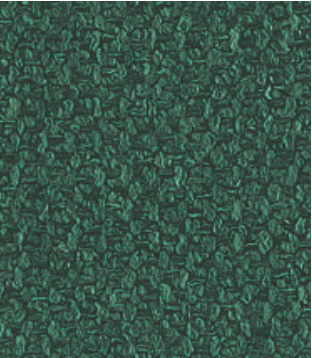

Beacon Forest

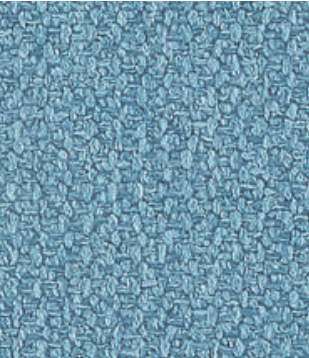

Beacon Sky



Beacon Maritime

SYNERGY | CATEGORY 1

RANGE NAME	SYNERGY	TEST STANDARDS	TEST RESULTS
Product Brand	Prisma-Faux Leather PVC	Martindale Abrasion ISO 12947	150,000 Cycles
Description	Faux Leather PVC Odour Free, Phthalate Free, Low VOC's	Wyzenbeek Abrasion AS2001.2.30	100,000 Double Rubs
Performance	Heavy Commercial	Seam slippage (mm) ISO 13936-2	Warp: 02.5 Weft: 3.3
Application	Upholstery, Commercial	Colour fastness to light- Xenon arc (ISO 105-B02, blue std 6)	5
Composition	100% PVC Face W/- Doubleknit Polyester Backing	Colour fastness to rubbing ISO 105-X12:1993	Dry-5 Wet-5 (Min 4)
Width	140cm	Colour fastness to perspiration, alkaline ISO 105-E04	Colour Change - 5 (min 4) Staining Multifibre - 5 (min 4)
Weight	730gsm	Free and hydrolysed formaldehyde ISO 14184-1:1998	Not Detectable
Pattern Repeat	Plain	Colourfastness to bleaching - hypochlorite AS2001.4 11-1982 5% Solution 40g/L Sodium Hypochloite	Colour change 5 (after 5 Bleach Cleans)
Care Lable	PVC	Resistance to Flexing - AS4878.9 Mtd B (requirement - no cracking > 15,000 cycles)	No cracking of PVC layer after 400,000 Cycles in Length & Width
Stain Resistant	Wipe Clean - PFC Free		
Warranty	5 Years* (In accordance with care instructions)		

CARE

Bleach cleanable
Do not wash
Do not tumble dry

FLAMMABILITY-AS/NZS 1530.3-1999

Ignitability (0-20)	0
Spread of Flame (0-10)	0
Heat Evolved (0-10)	0
Smoke Developed (0-10)	6
Quality Management System ISO 9001	YES



Synergy Vanilla



Synergy Alaska



Synergy Moonrock



Synergy Kangaroo



Synergy Silver



Synergy Castlerock



Synergy Caviar



Synergy Tan



Synergy Honey



Synergy Marsala



Synergy Aqua



Synergy Peacock




Synergy Celadon



Synergy Evergreen



Synergy Powder Blue

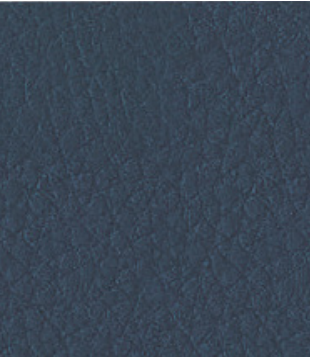

Synergy Royal

FINESSE | CATEGORY 1

RANGE NAME	FINESSE
Description	High Performance, Easy Clean, Furniture Fabric. Machine Washable
Performance	Heavy Commercial - 72,500 rubs
Application	Upholstery, Commercial
Composition	100 % Polyester
Width	140cm
Weight	450gsm
Pattern Repeat	Plain
Care Lable	3U
Stain Resistant	Inherent stain resistance
Warranty	3 Years* (In accordance with care instructions)


CARE

Wash to 40°C
Do not chlorine bleach
Do not tumble dry
Professional dry clean
Drip line drying in the shade
Protect from direct sunlight
Warm iron (150°C) reverse side
using barrier cloth

TEST STANDARDS	TEST RESULTS
Martindale Abrasion ISO 12947	72,500 Cycles
Seam slippage (mm) ISO 13936-2	Warp: 3.6mm Weft: 3.3mm
Colour fastness to light- Xenon arc (ISO 105-B02, blue std 6)	< 6
Colour fastness to rubbing ISO 105-X12:1993	Dry: 5, Wet: 4/5
Free and hydrolysed formaldehyde ISO 14184-1:1998	Not Detectable

FLAMMABILITY-AS1530.3


Ignitability (0-20)	0
Spread of Flame (0-10)	0
Heat Evolved (0-10)	0
Smoke Developed (0-10)	1
USA Fire Test-US Cal. Bull 1172013	PASS
Oekotex Standard 100	YES
Quality Management System ISO 9001	YES
Machine Washability - ISO 6330:2021	PASS

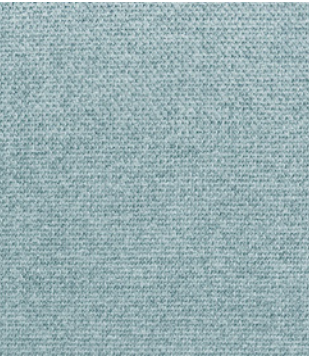


Cameo



Storm

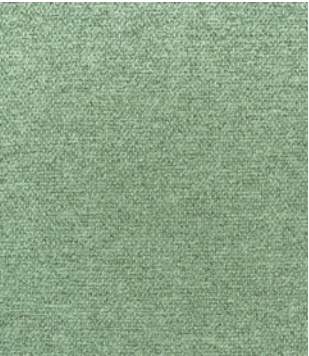


Hedge

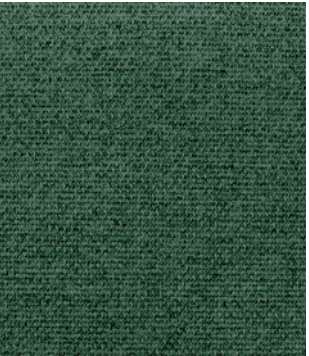

Hunter




Wattle

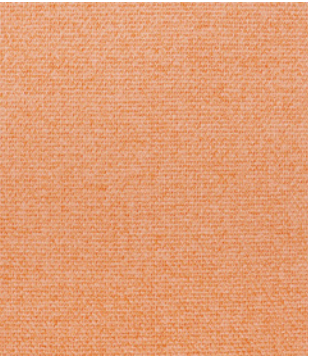

Coral



Shell

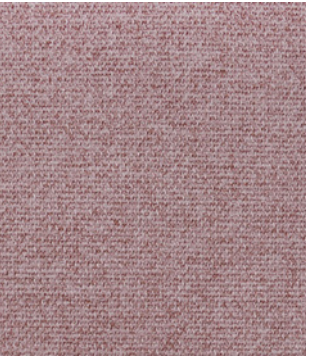


Musk




Pebble



Driftwood

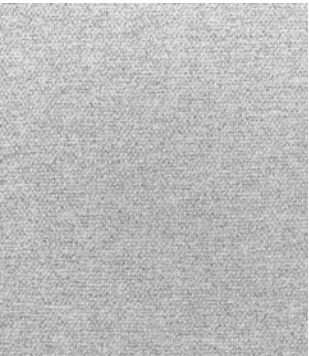

Nickel

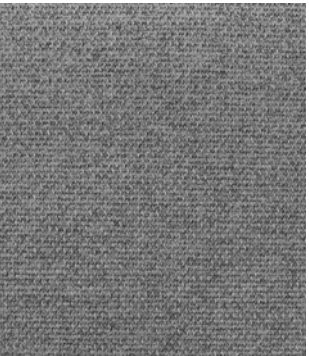

Flint




Slate

DIPLOMAT | CATEGORY 2


RANGE NAME	DIPLOMAT	TEST STANDARDS	TEST RESULTS
Product Brand	PRET/KAVLON FABRICS	Martindale Abrasion ISO 12947	>100,000 Cycles
Description	High Performance, Easy Clean, Furniture Fabric with minimum 40% PC Polyester yarns from recycled plastic bottles.	Seam slippage (mm) ISO 13936-2	Warp: 3.5 Weft: 3.7
Performance	Heavy Commercial	Colour fastness to light- Xenon arc (ISO 105-B02, blue std 6)	6
Application	Upholstery, Commercial	Colour fastness to rubbing ISO 105-X12:1993	4/5
Composition	77% PC Recycled Polyester 23% Virgin Polyester	Free and hydrolysed formaldehyde ISO 14184-1:1998	Not Detectable
Width	140cm	Pilling resistance ISO 12945-2	4
Weight	550gsm	FLAMMABILITY-AS/NZS 1530.3-1999	
Pattern Repeat	Plain	Ignitability (0-20)	0
Care Lable	3	Spread of Flame (0-10)	0
Stain Resistant	KAVLON-PFC Free Inherent stain resistance	Heat Evolved (0-10)	0
Warranty	3 Years* (In accordance with care instructions)	Smoke Developed (0-10)	5
CARE Do not wash Do not chlorine bleach Do not tumble dry Professional dry clean		USA Fire Test-US Cal. Bull 1172013	PASS
		Oekotex Standard 100	YES
		Quality Management System ISO 9001	YES




Diplomat Cloud

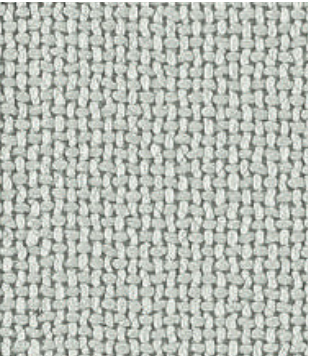

Diplomat Coconut

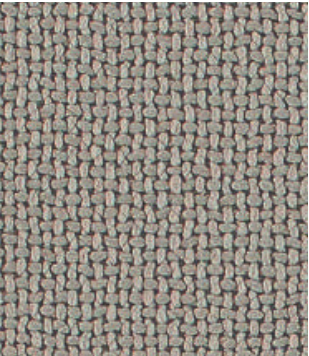

Diplomat Drift Wood

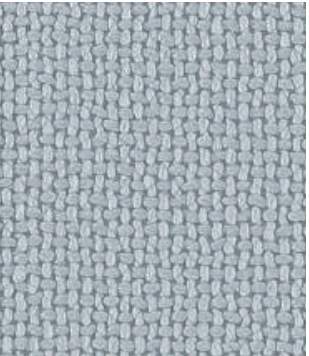

Diplomat Platinum




Diplomat Smoke




Diplomat Charcoal




Diplomat Ebony

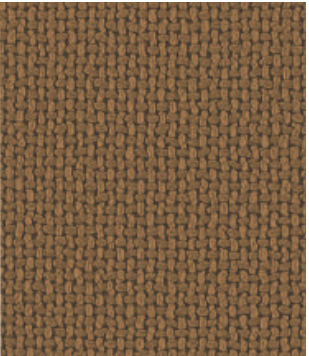


Diplomat Saddle

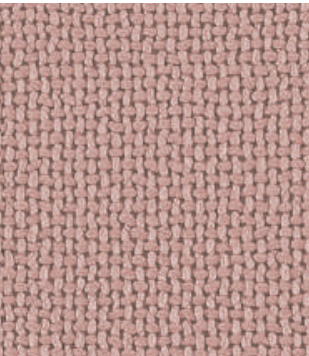


Diplomat Blush

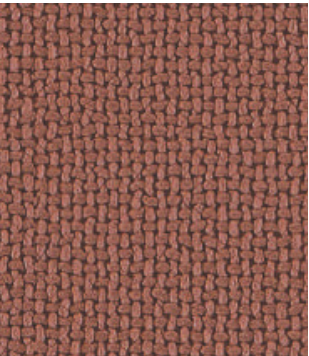


Diplomat Cotta

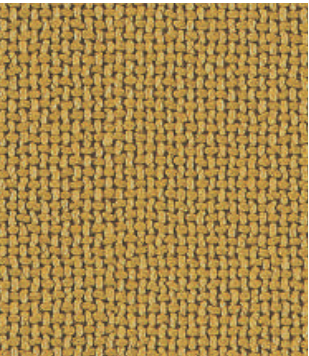


Diplomat Nugget

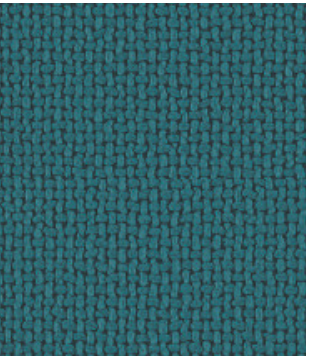


Diplomat Mallard

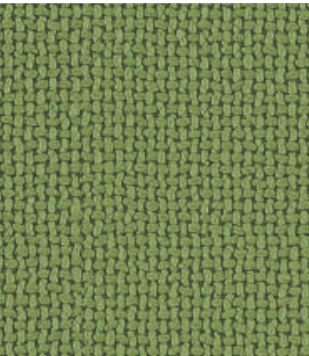

Diplomat Aspen

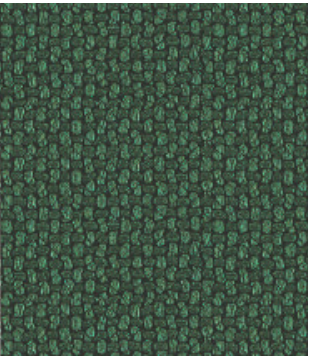

Diplomat Sherwood

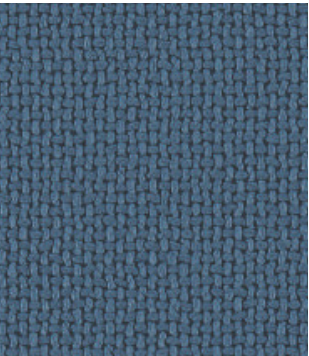

Diplomat Marina



Diplomat Indigo

VELVET | CATEGORY 2

RANGE NAME	VELVET
Description	High Performance, Easy Clean, Furniture Fabric.
Performance	Heavy Commercial - 110, 000 rubs
Application	Upholstery, Commercial
Composition	100 % Polyester
Width	145cm
Pattern Repeat	Plain
Care Lable	1U
Stain Resistant	Inherent stain resistance
Warranty	3 Years* (In accordance with care instructions)

CARE

Wash to 40°C
Do not remove cushion covers for separate cleaning or washing
Do not chlorine bleach
Do not tumble dry
Professional cleaning recommended
Protect from direct sunlight

TEST STANDARDS	TEST RESULTS
Martindale Abrasion ISO 12947	37,500 Cycles
Seam slippage (mm) ISO 13936-2	Warp: 3.0mm Weft: 3.3mm
Colour fastness to light- Xenon arc (ISO 105-B02, blue std 6)	5/6
Colour fastness to rubbing ISO 105-X12:1993	Dry: 4/5, Wet: 4/5
Free and hydrolysed formaldehyde ISO 14184-1:1998	Not Detectable

FLAMMABILITY-AS1530.3


Ignitability (0-20)	0
Spread of Flame (0-10)	0
Heat Evolved (0-10)	1
Smoke Developed (0-10)	4
USA Fire Test-US Cal. Bull 1172013	PASS
Oekotex Standard 100	YES
Quality Management System ISO 9001	YES




Denim




Mallard

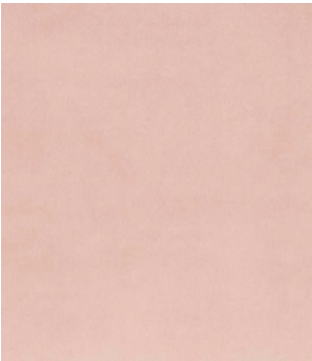

Petal

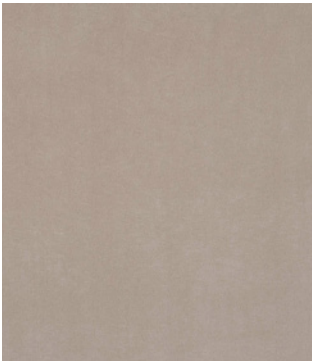

Platinum

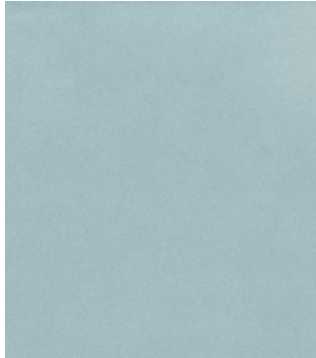

Sky



Slate



Velvet

UNI | CATEGORY 2

RANGE NAME	UNI	TEST STANDARDS	TEST RESULTS
Product Brand	Prisma-Faux Leather PVC	Martindale Abrasion ISO 12947	150,000 Cycles
Description	Faux Leather PVC Odour Free, Phthalate Free, Low VOC's	Wyzenbeek Abrasion AS2001.2.30	100,000 Double Rubs
Performance	Heavy Commercial	Seam slippage (mm) ISO 13936-2	Warp: 2.0 Weft: 2.0
Application	Upholstery, Commercial	Colour fastness to light- Xenon arc (ISO 105-B02, blue std 6)	6
Composition	100% PVC Face W/- Doubleknit Polyester Backing	Colour fastness to rubbing ISO 105-X12:1993	Dry-5 Wet-5 (Min 4)
Width	140cm	Colour fastness to perspiration, alkaline ISO 105-E04	Colour Change - 5 (min 4) Staining Multifibre - 5 (min 4)
Weight	830gsm	Free and hydrolysed formaldehyde ISO 14184-1:1998	Not Detectable
Pattern Repeat	Plain	Colourfastness to bleaching - hypochlorite AS2001.4 11-1982 5% Solution 40g/L Sodium Hypochloite	Colour change 5 (after 5 Bleach Cleans)
Care Lable	PVC	Resistance to Flexing - AS4878.9 Mtd B (requirement - no cracking > 15,000 cycles)	No cracking of PVC layer after 400,000 Cycles in Length & Width
Stain Resistant	Wipe Clean		
Warranty	5 Years* (In accordance with care instructions)		

CARE

Bleach cleanable
Do not wash
Do not tumble dry

FLAMMABILITY-AS/NZS 1530.3-1999

Ignitability (0-20)	0
Spread of Flame (0-10)	0
Heat Evolved (0-10)	0
Smoke Developed (0-10)	7
Quality Management System ISO 9001	YES



Uni Tusk




Uni Dune



Uni Mocha



Uni Tobacco

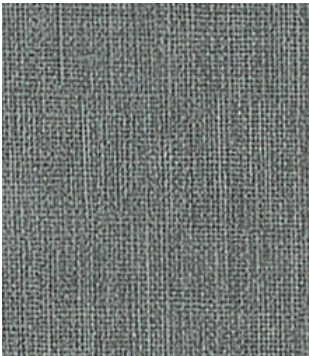


Uni Zinc




Uni Raven



Uni Ochre

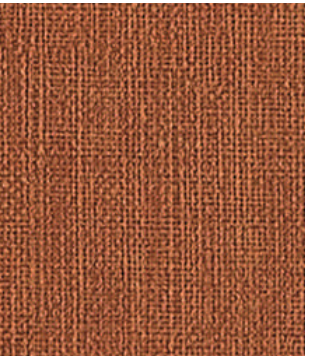


Uni Jaffa

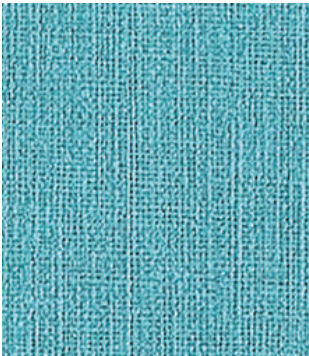

Uni Delft



Uni Pagoda

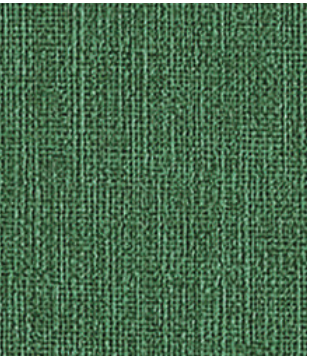

Uni Hunter



Uni Ink

VISTA VINYL | CATEGORY 3


RANGE NAME	VISTA	TEST STANDARDS	TEST RESULTS
Product Brand	Prisma Faux Leather ECO PU	Martindale Abrasion ISO 12947	150,000 Cycles
Description	Sustainable ECo PU Odour Free & Phthalate Free	Wyzenbeek Abrasion AS2001.2.30	100,000 Double Rubs
Performance	Heavy Commercial	Seam slippage (mm) ISO 13936-2	Warp: 0 Weft: 0
Application	Upholstery, Commercial	Colour fastness to light- Xenon arc (ISO 105-B02, blue std 6)	>6
Composition	96% PU 4% Silicone	Colour fastness to rubbing ISO 105-X12:1993	Dry-5 Wet-5 (Min 4)
Width	140cm	Colour fastness to perspiration, alkaline ISO 105-E04	Colour Change - 5 (min 4) Staining Multifibre - 5 (min 3/4)
Weight	565gsm	Free and hydrolysed formaldehyde ISO 14184-1:1998	Not Detectable
Pattern Repeat	Plain	Colourfastness to bleaching - hypochlorite AS2001.4 11-1982 5% Solution 40g/L Sodium Hypochloite	Satisfactory no cracking of PU Layer
Care Lable	PU	Resistance to Flexing - AS4878.9 Mtd B (requirement - no cracking > 15,000 cycles)	No cracking of PVC layer after 400,000 Cycles in Length & Width
Stain Resistant	Easy Clean Silicone - PFC Free		
Warranty	5 Years* (In accordance with care instructions)		

CARE

Bleach cleanable
Do not wash
Do not tumble dry

FLAMMABILITY-AS/NZS 1530.3-1999

Ignitability (0-20)	0
Spread of Flame (0-10)	0
Heat Evolved (0-10)	0
Smoke Developed (0-10)	5
USA Fire Test-US Cal. Bull 1172013	PASS
Quality Management System ISO 9001	YES

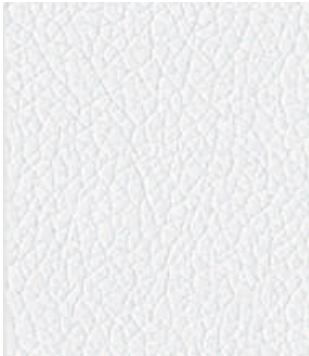

Vista Chalk



Vista Paloma



Vista Shiitake



Vista Pewter



Vista Granite



Vista Ironstone



Vista Onyx



Vista Rawhide




Vista Blossom



Vista Cinnabar



Vista Old Gold

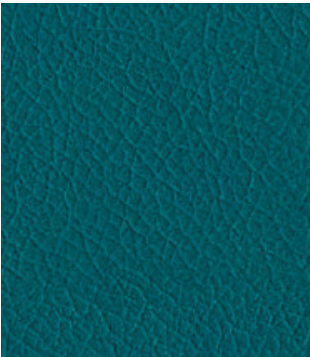

Vista Teal



Vista Avocado



Vista Loden



Vista Pacific



Vista Atlantic