


Humanscale®

M2.1 Monitor Arm

User Guide

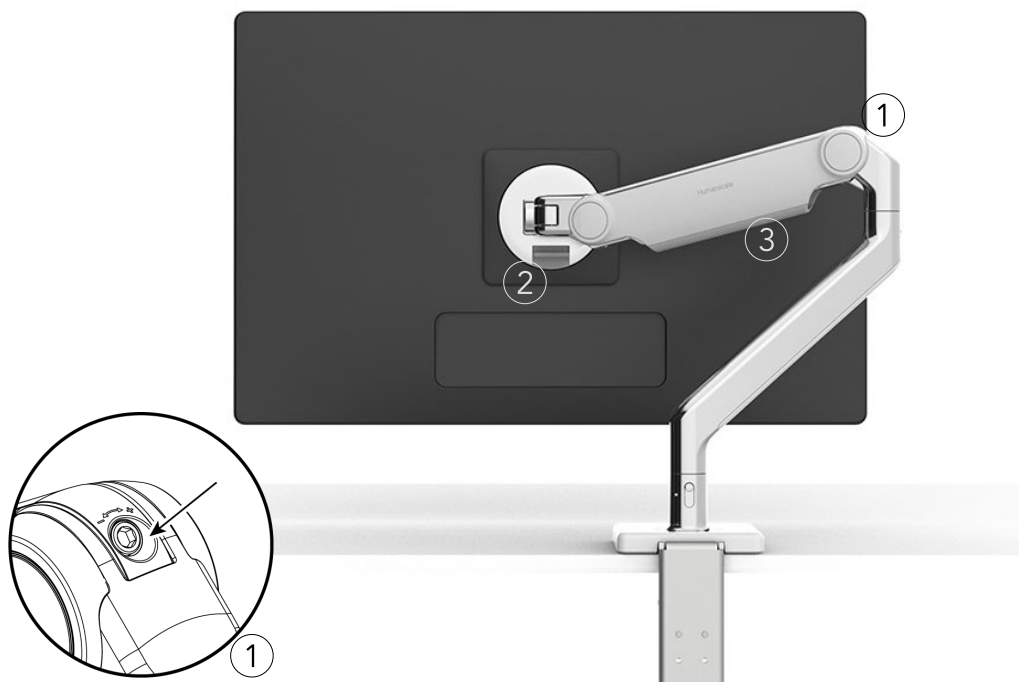

The M2.1 Monitor Arm by Humanscale features smooth articulation and responsive movements which allow easy adjustment of your monitor position. The screen can be rotated between portrait and landscape with minimal effort and no effect on the stability of the arm.

1. Arm Tension

The M2.1 monitor arm supports weights up to 7kg. The tension of the arm can be adjusted to support the weight of the monitor using a 4mm hex key. Rotating the screw clockwise (towards +) will increase load tension and anticlockwise (towards -) will reduce load tension.

2. VESA Release

To remove the monitor press up on the latch and lift the monitor up and off.

3. Cable Reticulation

Monitor cables can be tidied by tucking them into the flexible rubber channels fitted to the underside of the arm.